



QUICK REFERENCE TREAD GUIDE



TABLE OF CONTENTS

ALL POSITION RETREADS	3
XZA® Pre-Mold™ Retread	3
XZE® Pre-Mold™ Retread	3
XZE® SA Pre-Mold™ Retread	3
XZE®2 Pre-Mold™ Retread	4
XZA® Wide Base Pre-Mold™ Retread	4
XZU®2 Pre-Mold™ Retread	4
X ONE® XZU®S Pre-Mold™ Retread	5
X ONE® XZU®S+ Pre-Mold™ Retread	5
XZU®S Pre-Mold™ Retread	5
XZH® Wide Base Pre-Mold™ Retread	6
XZL® Wide Base Pre-Mold™ Retread	6
XZY® Pre-Mold™ Retread	6
XZY® Wide Base Pre-Mold™ Retread	7
XZY®3 Pre-Mold™ Retread	7
XZY®3 Wide Base Pre-Mold™ Retread	7
DRIVE POSITION RETREADS	8
X® LINE ENERGY D Pre-Mold™ Retread	8
X ONE® LINE ENERGY D Pre-Mold™ Retread	8
XD4® Pre-Mold™ Retread	8
XDA2® 19 AT and 23 AT* Pre-Mold™ Retread	9
X ONE® XDN®2 Pre-Mold™ Retread	9
X ONE® XDA-HT™ Pre-Mold™ Retread	9
XDA-HT <i>High Torque</i> Pre-Mold™ Retread	10
XDC® 18 and XDC® 22 Pre-Mold™ Retread	10
XDHT® Pre-Mold™ Retread	10
XDN®2 Pre-Mold™ Retread	11
XM+S4® Pre-Mold™ Retread	11
X® MULTI ENERGY D Pre-Mold™ Retread	11
CD-LL Pre-Mold™ Retread	12
MD XDN®2 Pre-Mold™ Retread	12
XDE® M/S Pre-Mold™ Retread	12
XDS®2+ Pre-Mold™ Retread	13
XDU®S Pre-Mold™ Retread	13
XDY® Pre-Mold™ Retread	13
XDY-1™ Pre-Mold™ Retread	14
XDY-EX™ Pre-Mold™ Retread	14
TRAILER POSITION RETREADS	15
X ONE® LINE ENERGY T Pre-Mold™ Retread	15
XT-1® AT* Pre-Mold™ Retread	15
XTA® Pre-Mold™ Retread	16
XTA®-1 Pre-Mold™ Retread	16
X ONE® MULTI ENERGY T Pre-Mold™ Retread	16
XTE2® Wide Base Pre-Mold™ Retread	17
XTY® SA Pre-Mold™ Retread	17
IT2® Pre-Mold™ Retread	17
MICHELIN® RETREADS QUICK REFERENCE TREAD GUIDE	18
Standard Sizes	18
Wide Base and MICHELIN® X One® Retread Sizes	20
Custom Mold™ Tread Guide	20


MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligation.

ALL POSITION RETREADS

XZA® Pre-Mold™ Retread


All-wheel position tread design with proven versatility and exceptional resistance to scrub and abrasion for line haul and regional applications.

- Solid shoulder to help withstand scrub and abrasion.
- Designed for long mileage and even wear
- Available siped and as a Custom Mold™ retread.



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	140	150	160	170	180	194	203	211	219	225
MSPN (MSPN Siped)		72464	95829	43903	48480	53906 (74087)	71005 (70659)	92719 (53937)	74565 (56193)	85773 (61685)	94169 (91816)
Tread Depth	Metric	10.5 mm					12 mm				
	Inches	13/32"					15/32"				



Available in the 240 mm - 20/32" width only.

Tread Sizes	Metric	240
MSPN		55653
Tread Depth	Metric	16 mm
	Inches	20/32"

XZE® Pre-Mold™ Retread

All-position retread designed for regional and line haul applications requiring exceptional traction and tire wear resistance.

- Solid shoulders to help withstand scrub and abrasion.
- Deep siping for optimized traction.
- Available siped and as a Custom Mold™ retread.




LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	168	177	194	203	211	219	225	
MSPN (MSPN Siped)		57118	62459	91791 (90947)	59028	86080 (78892)	51733 (50397)	55240 (70056)	
Tread Depth	Metric	13 mm	14 mm						
	Inches	16/32"	18/32"						

XZE® SA Pre-Mold™ Retread

Spread-axle retread designed to incorporate unique product and process advancements enabling it to deliver exceptional levels of durability and mileage in line haul and regional applications.

- Rounded shoulders to help minimize scrub effects typical of spread axle applications.
- Tapered tread extensions to help withstand shifting footprint stress typical of spread axle applications while helping to maintain casing durability.



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	185/225 ¹	195/235 ¹	205/245 ¹	215/255 ¹	225/265 ¹	245/285 ¹	
MSPN		88535	41751	50852	77535	97320	25967	
Tread Depth	Metric	14 mm						
	Inches	18/32"						

¹ Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.


Exceeding the legal speed limit is neither recommended nor endorsed.

ALL-POSITION RETREADS

XZE[®]2 Pre-Mold™ Retread

All-position retread designed for regional applications requiring exceptional tire wear resistance.

- Compound optimized for regional and over-the-road operations.
- Center grooves for good water evacuation.
- Good traction.
- Performs well in both high scrub and low scrub conditions.



LINE HAUL	REGIONAL	URBAN	ON/OFF ROAD
-----------	----------	-------	-------------


Tread Sizes	Metric	240	250	260
MSPN		17469	38469	34463
Tread Depth	Metric	16 mm		
	Inches	20/32"		

XZA[®] Wide Base Pre-Mold™ Retread

All-wheel position tread design with proven versatility and wide shoulder rib to withstand scrub and abrasion for regional applications.

- Wide shoulder rib to help withstand scrub and abrasion.
- Tapered tread extensions to help withstand shifting footprint stress typical of wide base service.

¹ Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.



LINE HAUL	REGIONAL	URBAN	ON/OFF ROAD
-----------	----------	-------	-------------

Tread Sizes	Metric	290/345 ¹	320/365 ¹
MSPN		07525	08650
Tread Depth	Metric	15 mm	
	Inches	19/32"	


XZU[®]2 Pre-Mold™ Retread

All-position retread optimized for operations involving frequent stopping and starting e.g., transit buses¹, delivery vehicles and sanitation trucks.

- Unique two compound design to help deliver long mileage and to help minimize internal casing temperatures.
- Solid shoulder design optimized for long, smooth wear.
- Fuel efficient compound to help contribute to greater fuel savings.²

¹ Regulations in certain Canadian provinces state that "it is forbidden to drive a bus or coach with regrooved or retreaded front tires."

² Based on industry standard rolling resistance testing of comparable tires and retreads. Actual results may vary, and may be impacted by many factors, to include road conditions, weather and environment, driver performance, etc.



LINE HAUL	REGIONAL	URBAN	ON/OFF ROAD
-----------	----------	-------	-------------

Tread Sizes	Metric	230	240	250
MSPN		11059	11107	11486
Tread Depth	Metric	20 mm		
	Inches	24/32"		

ALL-POSITION RETREADS

X ONE® XZU®S Pre-Mold™ Retread

Multi-purpose, all-axle, next generation wide-based single, designed with traction and durability features for demanding urban applications.

- Long tread life and outstanding scrub resistance in Urban/Regional service with 23/32nds original tread depth of application-specific compound.
- Co-Ex Technology, unique two layer compound designed to minimize casing temperature for longer casing life.
- Enhanced protection against stone drilling from variable pitch groove walls and groove bottom protectors in all grooves.
- Tread design optimized for all weather traction.



LINE HAUL REGIONAL URBAN ON/OFF ROAD


Tread Sizes	Metric	390/430 ¹
MSPN		20035
Tread Depth	Metric	18 mm
	Inches	23/32"

¹ Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.

X ONE® XZU®S+ Pre-Mold™ Retread

Industry leading, all-position, next generation wide-based single, designed with 50% greater wear life¹ and durability for demanding urban applications.²

- 50% greater wear life and outstanding scrub resistance in Urban/Regional service with 29/32nds original tread depth of application-specific compound.
- Co-Ex technology, unique two layer compound designed to minimize casing temperature for longer casing life.
- Wing tread design for added protection on the shoulders for high scrub application.
- Rib tread design optimized for better on road feel and long wear.



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	385/435 ³
MSPN		71480
Tread Depth	Metric	23 mm
	Inches	29/32"

¹ Vs. MICHELIN® X ONE® XZU®S Pre-Mold™ Retread.


² Used in intermittent highway service with maximum speed of 105 km/h.

³ Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.

XZU®S Pre-Mold™ Retread

All-position retread helps provide longer, more even wear in demanding regional/urban operations.

- Long tread life is delivered through a combination of features that resist scrub, such as use of a proprietary compound, optimized rib design, and high rubber mass.



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	220	230	240	250	270	280
MSPN		21300	15865	95666	17768	39959	68447
Tread Depth	Metric	21 mm					
	Inches	26/32"					

Exceeding the legal speed limit is neither recommended nor endorsed.

ALL-POSITION RETREADS

XZH® Wide Base Pre-Mold™ Retread

All-position retread designed for scrub resistance and high mileage in on/off road applications.

- Abrasion-resistant compound.
- Self-cleaning lugs, open shoulder design for exceptional traction and excellent flotation.
- Tapered tread extensions to help withstand shifting footprint stress typical of wide base service.

¹ Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.



LINE HAUL	REGIONAL	URBAN	ON/OFF ROAD
-----------	----------	-------	-------------

Tread Sizes	Metric	350/395 ¹
MSPN		43429
Tread Depth	Metric	16 mm
	Inches	20/32"

XZL® Wide Base Pre-Mold™ Retread

All-position tire designed to deliver long life for challenging on/off road applications.

- Co-Ex technology, unique two-layer compound designed to minimize internal casing temperature for longer tread and casing life.
- Wing tread design for added protection on the shoulders for high scrub applications.
- Self-cleaning, open-shoulder tread design features offset elements to help enhance traction.
- Stable block design helps ensure a consistent footprint, even in free-rolling positions, to help deliver smooth, even wear and a quiet ride.

¹ Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.




LINE HAUL	REGIONAL	URBAN	ON/OFF ROAD
-----------	----------	-------	-------------

Tread Sizes	Metric	350/395 ¹
MSPN		75413
Tread Depth	Metric	24 mm
	Inches	30/32"

XZY® Pre-Mold™ Retread

All-position retread designed for regional and on/off road applications requiring exceptional tire wear resistance.

- Chip and cut resistant compound.
- Rib design optimized for quiet running and even wear.
- All wheel position capable.
- Shoulder scallops provide additional traction.



LINE HAUL	REGIONAL	URBAN	ON/OFF ROAD
-----------	----------	-------	-------------

Tread Sizes	Metric	203	211	219	225	232	238	250
MSPN		54622	51695	61672	66458	92668	47479	64343
Tread Depth	Metric	14 mm						16 mm
	Inches	18/32"						20/32"

ALL-POSITION RETREADS

XZY® Wide Base Pre-Mold™ Retread

All-position retread designed to deliver long tire life for challenging on/off road applications.

- Abrasion-resistant compound for long casing and tread life.
- Tapered tread extensions to withstand shifting footprint stress typical of wide base service.
- Also available as a Custom Mold™ retread.

¹ Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.




LINE HAUL	REGIONAL	URBAN	ON/OFF ROAD
-----------	----------	-------	-------------

Tread Sizes	Metric	320/365 ¹
MSPN		30949
Tread Depth	Metric	16 mm
	Inches	20/32"

XZY®3 Pre-Mold™ Retread

All-wheel position tread designed for exceptional wear and all-position traction in mixed on/off road service. Abrasion resistance compound promotes long casing and tread life.

- Heavy Duty Tread Protection – Anti-Cut/Chip Compound protects against aggression, chipping, and scaling.
- Stone Protection – Center Groove Bottom Protector guards against stone drilling and assists in stone ejection.
- Long Tread Life – Deep tread depth delivers long life in on/off road service.
- Maximized Traction – Aggressive 4-Rib Design provides traction in soft soil and mud.



LINE HAUL	REGIONAL	URBAN	ON/OFF ROAD
-----------	----------	-------	-------------

Tread Sizes	Metric	210	220	230	240	250	270	280
MSPN		40131	41044	41385	43241	48547	48974	50408
Tread Depth	Metric	19 mm						
	Inches	24/32"						

XZY®3 Wide Base Pre-Mold™ Retread

All-wheel position tread designed for exceptional wear and all-position traction in mixed on/off road service. Abrasion resistance compound promotes long casing and tread life.

- Heavy Duty Tread Protection – Anti-Cut/Chip Compound protects against aggression, chipping, and scaling.
- Stone Protection – Center Groove Bottom Protector guards against stone drilling and assists in stone ejection.
- Long Tread Life – Deep tread depth delivers long life in on/off road service.
- Maximized Traction – Aggressive 4-Rib Design provides traction in soft soil and mud.

¹ Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.



LINE HAUL	REGIONAL	URBAN	ON/OFF ROAD
-----------	----------	-------	-------------

Tread Sizes	Metric	290/345 ¹
MSPN		12185
Tread Depth	Metric	17 mm
	Inches	22/32"

DRIVE POSITION RETREADS

X[®] LINE ENERGY D Pre-Mold™ Retread

SmartWay
Verified

Drive position retread designed to offer exceptional SmartWay[®] fuel economy with leading tread life and traction in a line haul application.

- No compromise SmartWay[®] fuel economy and wear resistance from Dual Compound Tread Technology, combining wear resistant properties in the top tread layer, with cool running compounds in the bottom layer that promote low rolling resistance and long casing life.
- 25% longer tread life GUARANTEED¹ vs. competitive SmartWay line haul drive retreads, thanks to Dual Compound Tread Technology and Matrix Siping (see Guarantee for details).
- Driver confidence comes from the outstanding traction of Matrix Siping.
- MICHELIN[®] ON MICHELIN[®] ²

1 Based on internal tests against SmartWay requirements.

2 A premium MICHELIN[®] retread with special guarantee(s) when retreaded on a MICHELIN[®] casings. See guarantee(s) at michelintruck.com for details.



LINE HAUL	REGIONAL	URBAN	ON/OFF ROAD
-----------	----------	-------	-------------

Tread Sizes	Metric	220	230	240
MSPN		26837	27357	27540
Tread Depth	Metric	16.5 mm		
	Inches	21/32"		

X ONE[®] LINE ENERGY D Pre-Mold™ Retread

SmartWay
Verified


SmartWay[®] fuel economy¹ with long treadlife and excellent traction in line haul energy drive retread.

- No compromise fuel and mileage performance from Dual Energy Compound Tread technology, joining a top Fuel and Mileage tread layer over a cool running Fuel and Durability layer.
- Maximum shoulder adhesion is delivered with a winged tread feature.
- Driver confidence comes from the use of Matrix Siping, with its full depth, interlocking sipes provide thousands of biting edges for traction.
- MICHELIN[®] ON MICHELIN[®] ²

1 Based on industry standard rolling resistance testing of comparable tires and retreads. Actual results may vary, and may be impacted by many factors, to include road conditions, weather and environment, driver performance, etc.

2 A premium MICHELIN[®] retread with special guarantee(s) when retreaded on a MICHELIN[®] casings. See guarantee(s) at michelintruck.com for details.

3 Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.



LINE HAUL	REGIONAL	URBAN	ON/OFF ROAD
-----------	----------	-------	-------------

Tread Sizes	Metric	375/425 ³	
MSPN		08287	
Tread Depth	Metric	17 mm	
	Inches	22/32"	

XD4[®] Pre-Mold™ Retread

Drive position retread designed for *high torque* conditions, e.g. 4x2's, in line haul and regional applications.

- Extra deep tread design optimized for *high torque* applications e.g. 4x2's.
- Open shoulder design helps deliver exceptional traction.
- Unique scrub resistant compound.
- Also available as a Custom Mold™ retread.



LINE HAUL	REGIONAL	URBAN	ON/OFF ROAD
-----------	----------	-------	-------------

Tread Sizes	Metric	210	220	230
MSPN		92270	83674	78304
Tread Depth	Metric	22 mm		
	Inches	28/32"		

Exceeding the legal speed limit is neither recommended nor endorsed.

DRIVE POSITION RETREADS

XDA2® 19 AT and 23 AT* Pre-Mold™ Retread

Drive position retread designed for fuel savings, durability, and all-weather traction in wide-tread singles for line haul applications.

- Fuel efficient¹ Advanced Technology compound.
- No Compromise performance.
- Modified tread block design optimized for long, even wear.
- XDA2® 23 - also available as a Custom Mold™.



		XDA2 19 AT*		XDA2 23 AT*			
Tread Sizes	Metric	219	225	211	219	225	232
MSPN		56259	79760	77114	59027	60625	80338
Tread Depth	Metric	15 mm		18 mm			
	Inches	19/32"		23/32"			

* AT designated Advanced Technology™ Compounds for fuel savings.

¹ Based on industry standard rolling resistance testing of comparable tires and retreads. Actual results may vary, and may be impacted by many factors, to include road conditions, weather and environment, driver performance, etc.

X ONE® XDN®2 Pre-Mold™ Retread

The longest-wearing best traction MICHELIN® X One® drive retread for line haul and regional applications.

- Excellent Stability – Extra-Wide Tread – Provides stability while helping to improve handling and mileage.
- Long Tread Life with Exceptional Traction – Wide, Open Shoulder Grooves.
- Shoulder Adhesion – Winged Tread – Provides maximum shoulder adhesion in high scrub applications.
- Outstanding Traction and Even Wear – Matrix sipes help provide inter-locking action which offers excellent traction and even wear. Zig-Zag groove walls help provide optimized biting edges and excellent water and snow evacuation. Full depth sipes help provide excellent traction throughout the life of the tread.
- MICHELIN® ON MICHELIN®¹



Tread Sizes	Metric	375/425 ²	385/435 ²
MSPN		30379	31449
Tread Depth	Metric	21.5 mm	
	Inches	27/32"	


¹ A premium MICHELIN® retread with special guarantee(s) when retreaded on a MICHELIN® casings. See guarantee(s) at michelintruck.com for details.

² Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.

X ONE® XDA-HT™ Pre-Mold™ Retread

Drive position retread optimized for regional and line haul applications, requiring effective handling and long tread life.

- Aggressive Lug-Type Design.
- Increased Traction and Treadwear.
- Optimized for Regional and Line Haul Operations.
- Cool Running Compound.

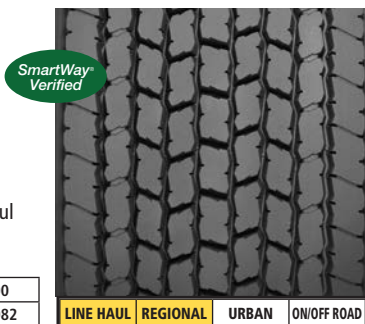

Tread Sizes	Metric	390	400
MSPN		18725	01082
Tread Depth	Metric	21 mm	
	Inches	26/32"	


Exceeding the legal speed limit is neither recommended nor endorsed.

DRIVE POSITION RETREADS

XDA-HT High Torque Pre-Mold™ Retread

Drive position retread optimized for line haul and regional applications, for new generation wide-based singles, requiring effective handling and long tread life.

- Unique two compound design to help deliver long mileage and minimize internal casing temperatures.
- Solid shoulder design optimized for long, smooth wear.
- Open lug design provides excellent traction in adverse conditions.



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	200	210	220	230	240	250	260
MSPN		79503	76860	97988	96795	89007	33721	33223
Tread Depth	Metric	22 mm						
	Inches	28/32"						

XDC® 18 and XDC® 22 Pre-Mold™ Retread

Drive position retread with well-balanced properties designed for excellent wear and traction in line haul and regional applications.

- Open shoulder design optimized for exceptional traction.
- Solid center rib helps promote long, even wear.
- Classic drive axle design delivers excellent wear and traction.




LINE HAUL REGIONAL URBAN ON/OFF ROAD

		XDC 18	XDC 22				
Tread Sizes	Metric	225	194	203	211	219	225
MSPN		56087	70037	75415	54426	96544	84986
Tread Depth	Metric	14 mm	17 mm				
	Inches	18/32"	22/32"				

XDHT® Pre-Mold™ Retread

Drive position retread designed for line haul and regional applications.

- Solid shoulder design optimized for high scrub applications.
- Block design optimized for high torque operations.
- Also available as a Custom Mold™ retread.
- Available siped.



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	180	194	203	211	219	225	232	240
MSPN (MSPN Siped)		44572	94558	54461	65683 (91143)	84811 (73107)	61815 (59826)	87926	10984
Tread Depth	Metric	15 mm	18 mm						
	Inches	19/32"	23/32"						

DRIVE POSITION RETREADS

XDN[®]2 Pre-Mold[™] Retread

The all-weather drive retread optimized for exceptional traction and mileage.

- Exclusive, unique two-layer compound designed to minimize internal casing temperatures for longer tread and casing life.
- Outstanding winter and wet traction utilizing Michelin's patented Matrix Siping technology.
- Wide open shoulder grooves help deliver traction without compromising tread life.
- Increased tread life over previous generation winter and wet traction tread.



Tread Sizes	Metric	220	230	240
MSPN		15171	87596	22661
Tread Depth	Metric	21.5 mm		
	Inches	27/32"		

XM+S4[®] Pre-Mold[™] Retread

Drive position retread with well-balanced properties designed for enhanced traction, especially in snow and mud conditions, for line haul and regional applications.

- Open lug tread design promotes self-cleaning of lugs maximizing mud and snow traction.
- Chevron block design for high traction and low noise.



Tread Sizes	Metric	177	194	203	211	219	225
MSPN		76467	67146	98504	64760	61591	67565
Tread Depth	Metric	16.5 mm					
	Inches	21/32"					

X[®] MULTI ENERGY D Pre-Mold[™] Retread

The leading high mileage, fuel efficient SmartWay[®] verified drive retread, optimized for regional and super regional applications.

- 25% longer tread life¹ guaranteed though the wear resistance of the dual energy compound tread, an optimized footprint and sipesaver technology.
- No compromise SmartWay[®] fuel economy is delivered by the dual energy compound tread, offering a top tread layer that delivers excellent fuel efficiency as well as exceptional wear properties, over a bottom layer of cool tread rubber that minimizes internal casing temperatures for low rolling resistance.
- Driver confidence comes from the outstanding traction of Matrix Siping.
- MICHELIN[®] ON MICHELIN[®]2

SmartWay[®]
Verified



Tread Sizes	Metric	220	230	240
MSPN		53432	54772	05189
Tread Depth	Metric	17 mm		
	Inches	21/32"		

¹ As compared to MICHELIN[®] XDA2[®] 23 Pre-Mold[™] Retreads

² A premium MICHELIN retread with special guarantee(s) when retreaded on a MICHELIN casing. See guarantee(s) at michelintruck.com for details.

DRIVE POSITION RETREADS

CD-LL Pre-Mold™ Retread

Drive position retread with well-balanced properties designed for trade-in vehicles in regional and line haul applications.

- Meets truck manufacturers trade-in requirements.
- 14/32nds tread depth.



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	210	220	230
	Standard	8.5N	9.0	9.5
MSPN		74178	61482	57932
Tread Depth	Metric	11 mm		
	Inches	14/32"		

MD XDN®2 Pre-Mold™ Retread

A drive position retread optimized for traction and mileage for regional medium duty food & beverage, parcel, and pickup & delivery vehicles with 19.5" tires.

- Designed for straight trucks and parcel package vehicles.
- Wide, open-shoulder grooves provide long wear life.
- Designed to minimize internal casing temperature for longer tread and casing life.
- Full-depth sipes provide excellent traction and even wear.



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	190	200	210	220	230
MSPN		87625	88045	88381	88997	89804
Tread Depth	Metric	14 mm		16 mm		
	Inches	18/32"		20/32"		

XDE® M/S Pre-Mold™ Retread

Drive position retread with well-balanced properties designed for enhanced traction, especially in muddy conditions, for regional applications.

- Open shoulder tread design optimized to help deliver high traction while providing excellent treadwear.
- Offset shoulder blocks help provide added traction in mud and soft soil conditions.



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	170	180	190	200	210	220	230
MSPN		57384	58140	42113	94728	66838	94447	86443
Tread Depth	Metric	14 mm		16 mm		17 mm		
	Inches	18/32"		20/32"		22/32"		

DRIVE POSITION RETREADS

XDS®2+ Pre-Mold™ Retread

Drive position retread designed to deliver year-round drive axle traction, optimized for severe winter conditions.

- Driving confidence in severe weather conditions comes with the improved traction of the MICHELIN® XDS®2+ Pre-Mold™ Retread.
- Deep sipes, zig-zag groove walls with optimized biting edges, and v-shaped transverse shoulder grooves for stone/mud/snow evacuation, deliver year round driving confidence.
- Wide contact patch to distribute force.
- Matrix Sipes provide inter-locking action which offers excellent traction and even wear.
- Directional tread that reduces heel/toe wear.
- Teardrop at the base of the sipes relieves stress and helps prevent tearing.
- 25/32nds original tread depth.



Tread Sizes	Metric	210	220	230	240	250*
MSPN		15860	16888	17019	17405	17979
Tread Depth	Metric	20 mm				
	Inches	25/32"				

* Available Q4 2018.

XDU®S Pre-Mold™ Retread

Drive position retread designed with optimal scrub resistance for challenging urban applications.

- More rubber mass to aid in scrub resistance.
- Exclusive, unique two-layer compound designed to minimize internal casing temperatures.
- Proprietary compound specifically formulated for demanding, high scrub operations.
- Lug design optimized for exceptional wear in high scrub, high traction operations.



Tread Sizes	Metric	220	230	240	250	270
MSPN		28156	15175	13197	17883	22587
Tread Depth	Metric	25 mm				
	Inches	32/32"				

XDY® Pre-Mold™ Retread

Drive position retread designed for on/off road, urban, and regional applications that demand rugged wear resistance.

- Chip and cut resistant compound.
- Deep tread for traction and mileage.



Tread Sizes	Metric	203	211	219	225	232	238	240	252
MSPN		81860	59052	65072	87485	48059	46614	70606	88519
Tread Depth	Metric	21 mm						25 mm	
	Inches	26/32"						32/32"	

Exceeding the legal speed limit is neither recommended nor endorsed.

DRIVE POSITION RETREADS

XDY-1™ Pre-Mold™ Retread

Drive position retread designed for on/off road and urban applications that demand rugged wear resistance.

- Chip and cut resistant compound.
- Directional tread optimized for traction.
- Extra deep tread for extra protection and mileage.




LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	211	219	225	232	238
MSPN		44358	61659	57316	52178	79263
Tread Depth	Metric	24 mm				
	Inches	30/32"				

XDY-EX™ Pre-Mold™ Retread

Delivers exceptional durability and traction in demanding off-road applications.

- Driving confidence for the challenging off-road conditions of construction, logging, and mining is delivered through an optimized tread, using a raised block sculpture, and deep 32/32nds of tread depth. This combination is designed to deliver exceptional traction in demanding environments.
- Long tread life is delivered using proprietary compound technology, that provides exceptional wear resistant properties, alongside stone ejector ledges to reduce the hazards of stone drilling.



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	220	230	240
MSPN		50243	11534	73643
Tread Depth	Metric	25 mm		
	Inches	32/32"		

X ONE® LINE ENERGY T Pre-Mold™ Retread

Exceptional SmartWay® fuel economy, long tread life, and the MICHELIN® ON MICHELIN®¹ casing guarantee in an outstanding line haul trailer retread.

- Up to 15% improvement in removal mileage² when retreaded on a MICHELIN® X ONE® LINE ENERGY T casing.
- SmartWay® fuel efficiency comes from using Michelin's Advanced Technology™ Compounds that deliver low rolling resistance with excellent mileage.
- Long tread life is enhanced using a Winged tread for maximum shoulder adhesion.
- Tread durability for longer life is enhanced using a winged tread, that provides maximum shoulder adhesion, along with waved groove bottoms to help prevent stone drilling.
- Excellent handling comes from an optimized architecture featuring wide grooves that promote improved water evacuation.

SmartWay
Verified



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	375/425 ³
MSPN		89018
Tread Depth	Metric	10.5 mm
	Inches	13/32"


- 1 A premium MICHELIN® retread with special guarantee(s) when retreaded on a MICHELIN® casings. See guarantee(s) at michelintruck.com for details.
- 2 Based on current pull point vs MICHELIN® X ONE® XTA® Pre-Mold™ Retread retreaded on a MICHELIN® X ONE® XTA® casing, using field testing and observation.
- 3 Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.

XT-1® AT* Pre-Mold™ Retread

Premium trailer position retread for line haul applications, providing fuel efficiency and long, even wear.

- Fuel efficient¹ Advanced Technology™ compound.
- No Compromise Performance.
- Also available as a Custom Mold™ retread.
- Available siped.

SmartWay
Verified



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	203	211	219	225	240
MSPN (MSPN Siped)		74810	48102 (61058)	43303 (47642)	70420 (94407)	04978
Tread Depth	Metric	10 mm				
	Inches	12/32"				

* AT designated Advanced Technology™ Compounds for fuel savings.

¹ Based on industry standard rolling resistance testing of comparable tires and retreads. Actual results may vary, and may be impacted by many factors, to include road conditions, weather and environment, driver performance, etc.


TRAILER POSITION RETREADS

XTA® Pre-Mold™ Retread

Trailer position retread designed to deliver good, all-purpose performance in line haul and regional applications.

- Excellent stability.
- Good resistance in high scrub operations.

Tread Sizes	Metric	240	260
MSPN		26264	24867
Tread Depth	Metric	13 mm	
	Inches	16/32"	



XTA®-1 Pre-Mold™ Retread

Trailer position retread designed to deliver enhanced wear-life in line haul and regional service.

- Solid shoulder to withstand most scrub and abrasion.
- Also available as a Custom Mold™ retread.
- Available siped.
- Shallow 11/32nds original tread depth for cool running and even wear.

Tread Sizes	Metric	194	203	211	219	225	240
MSPN (MSPN Siped)		49201	77843	46584 (96426)	79885 (88664)	85544 (59657)	26454
Tread Depth	Metric	9 mm					
	Inches	11/32"					



X ONE® MULTI ENERGY T Pre-Mold™ Retread

A SmartWay® verified trailer position retread which ensures the right balance of outstanding removal mileage, reduced irregular wear and fuel efficiency, optimized for regional applications.

- Excellent mileage delivered with optimized architecture to resist irregular wear and deep 15/32nds of tread depth.
- Long tread life is enhanced using a winged tread for maximum adhesion.
- Waved groove bottoms & stone ejectors help defend against stone drilling.
- Irregular wear is reduced by microsipes and a solid shoulder.
- SmartWay® fuel efficiency¹ comes from use of Advanced Technology™ Compounds to deliver low rolling resistance with excellent mileage.
- MICHELIN® ON MICHELIN®²



Tread Sizes	Metric	375/425 ³	385/435 ³
MSPN		55784	84963
Tread Depth	Metric	12 mm	
	Inches	15/32"	

¹ Based on industry standard rolling resistance testing of comparable tires and retreads. Actual results may vary, and may be impacted by many factors, to include road conditions, weather and environment, driver performance, etc.

² A premium MICHELIN® retread with special guarantee(s) when retreaded on a MICHELIN® casings. See guarantee(s) at michelintruck.com for details.

³ Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.


TRAILER POSITION RETREADS

XTE2® Wide Base Pre-Mold™ Retread

Wide grooves provide exceptional water evacuation.

- Wide shoulder rib to help resist scrub and abrasion.
- Tapered tread extensions to withstand shifting footprint stress typical of wide base service.

1 Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.



LINE HAUL REGIONAL URBAN ON/OFF ROAD


Tread Sizes	Metric	290/345 ¹
MSPN		88809
Tread Depth	Metric	16 mm
	Inches	20/32"

XTY® SA Pre-Mold™ Retread

Trailer position retread designed to deliver strong wear resistance and traction in demanding on/off road applications, especially for spread-axle and multi-axle rigs.

- Application specific chip and cut resistant compound.
- Tapered tread extensions to help withstand the stress typical of spread or multi-axle applications.
- Aggressive tread design for demanding regional and on/off road trailer operations.

1 Tread widths with two measurements have wings. The first number is tread base width in mm. The second number is the overall width, wing tip to tip.



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	195/235 ¹	205/245 ¹	215/255 ¹
MSPN		08667	36225	08911
Tread Depth	Metric	17 mm		
	Inches	22/32"		

IT2® Pre-Mold™ Retread

All position trailer axle retread is designed for use in intermodal applications.

- Optimized compound resists weather checking.
- Lightweight, with 11/32nds tread depth.
- Tread design deliver traction and wear resistance.
- For chassis use only.



LINE HAUL REGIONAL URBAN ON/OFF ROAD

Tread Sizes	Metric	200	210	220	230
	Standard	8.0	8.5N	9.0	9.5
MSPN		06637	24495	43280	68299
Tread Depth	Metric	9 mm			
	Inches	11/32"			

MICHELIN® RETREADS QUICK REFERENCE TREAD GUIDE

STANDARD SIZES

Tread Size	140	150	160	170	180	190	200
Size \ # DIE			162\#4	168\#5	177\#6	194\#7	203\#8
Spread Axle Sizes ¹						185/225	195/235
X® LINE ENERGY D							
X® MULTI ENERGY D							
XDA2® 23 AT*							
XDA2® 19 AT*							
XDA-HT <i>High Torque</i>							28
XD4®							
XDN®2							
MD XDN®2						18	18
XDHT® ²					19	23	23
CD LL							
IT2							11
XDC® 22						22	22
XDC® 18							
XM+S4®					21	21	21
XDE® M/S				18	18	20	20
XDS®2+							
XDU®S							
XDY®							26
XDY-1™							
XDY-EX™							
XZA® ²	13	13	13	13	13	15	15
XZE® ²				16	18	18	18
XZE® 2							
XZE® SA						18	18
XZU®2							
XZU®S							
XZY®							18
XZY®3							
XT-1® AT* ²							12
XTA®-1 ²						11	11
XTA®							
XTY® SA							22

For up-to-date product information please visit www.michelintruck.com

¹ Tread widths with two measurements have wings. The first number is tread base width in mm.

The second number is the overall width, wing tip to tip.

² Available siped. Consult Michelin Retread Technologies dealers for availability.

* AT designated Advanced Technology™ Compounds for fuel savings.

Product Availability (Tread Depth in Shaded Boxes)

	210	220		230	240	250	260	270	280
	211\#8.5N	219\#9	225\#9.5	232\#10	238\#10.5	252\#12			
	205/245	215/255		225/265	245/285				
		21		21	21				
		21		21	21				
	23	23	23	23					
		19	19						
	28	28		28	28	28	28		
	28	28		28					
		27		27	27				
	20	20		20					
	23	23	23	23	23				
	14	14		14					
	11	11		11					
	22	22	22						
			18						
	21	21	21						
	22	22		22					
	25	25		25	25	25			
		32		32	32	32		32	
	26	26	26	26	26 32	32			
	30	30	30	30	30				
		32		32	32				
	15	15	15		20				
	18	18	18						
					20	20	20		
	18	18		18	18				
				24	24	24			
		26		26	26	26		26	26
	18	18	18	18	18	20			
	24	24		24	24	24		24	24
	12	12	12		12				
	11	11	11		11				
					16		16		
	22	22							

- Regulations in certain Canadian provinces state that "it is forbidden to drive a bus or coach with regrooved or retreaded front tires."
- Retread tread selection should always consider the casing's original service application design and speed limit as published in that tire manufacturer's data book. Applying treads intended for a more severe service / speed application than the original casing design or that would imply a higher speed service than the casing's original speed rating, is generally not recommended.

MICHELIN® RETREADS QUICK REFERENCE TREAD GUIDE

Product Availability (Tread Depth in 32nds in Shaded Boxes)

WIDE BASE AND MICHELIN® X ONE® RETREAD SIZES

Tread Size	290/345 ¹	320/365 ¹	350/395 ¹	375/425 ¹	385/435 ¹	390	390/430 ¹	400
XTE2® Wide Base	20							
XZA® Wide Base	19	19						
XZH™ Wide Base			20					
XZL™ Wide Base			30					
XZY® Wide Base		20						
XZY®3 Wide Base	22							
X ONE® LINE ENERGY D				22				
X ONE® LINE ENERGY T				13				
X ONE® MULTI ENERGY T				15	15			
X ONE® XDA-HT						26		26
X ONE® XDN®2				27	27			
X ONE® XZU®S							23	
X ONE® XZU®S+					29			

For up-to-date product information please visit www.michelintruck.com

¹ Tread widths with two measurements have wings. The first number is tread base width in mm.

The second number is the overall width, wing tip to tip.

– Retread tread selection should always consider the casing’s original service application design and speed limit as published in that tire manufacturer’s data book. Applying treads intended for a more severe service / speed application than the original casing design or that would imply a higher speed service than the casing’s original speed rating, is generally not recommended.

CUSTOM MOLD™ TREAD GUIDE

Tread Size	11R22.5	11R24.5	275/80R22.5	275/80R24.5	445/50R22.5
XDA2® 23 AT	23	23	23	23	
XD4®				28	
XDHT®	23	23	23	23	
XDN®	26				
XDS®	25	25			
XDS® 2	25				
XZA®	15	15	15	15	
XZE®	18	18	18	18	
XT-1® AT	12	12	12	12	
XTA®-1	11	11	11	11	
X ONE® XTA®					13
X ONE® XTE®					16

To learn more please contact your MICHELIN® Sales Representative or visit www.michelintruck.com

© 2017 Michelin North America (Canada) Inc. All rights reserved. The "Michelin Man" is a registered trademark licensed by Michelin North America, Inc. PLNA10103E (C15453 - 10/17)